
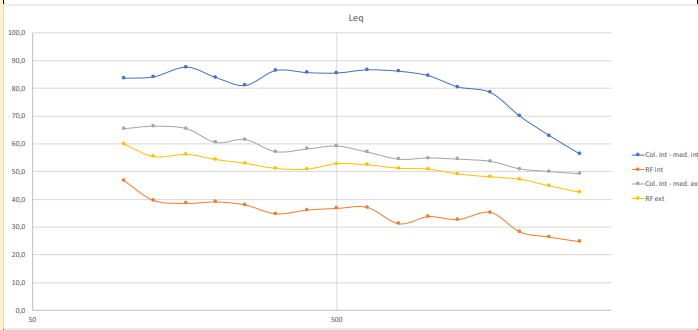


[illegible]

[illegible]


Banda de Frequências (Hz)	Valores de referência (em dB)		Curva de referência ajustada	DnT (em dB)
	Bandas de terços de oitava			
100	33		1	20,8
125	36		4	16,8
160	39		7	24,4
200	42		10	25,6
250	45		13	20,6
315	48		16	30,2
400	51		19	28,3
500	52		20	26,8
630	53		21	31,6
800	54		22	34,2
1000	55		23	31,2
1250	56		24	26,9
1600	56		24	25,2
2000	56		24	20,5
2500	56		24	14,0
3150	56		24	7,2


1
1
1
1
1
1
1
1
1
1
1
1
1
1
1
1

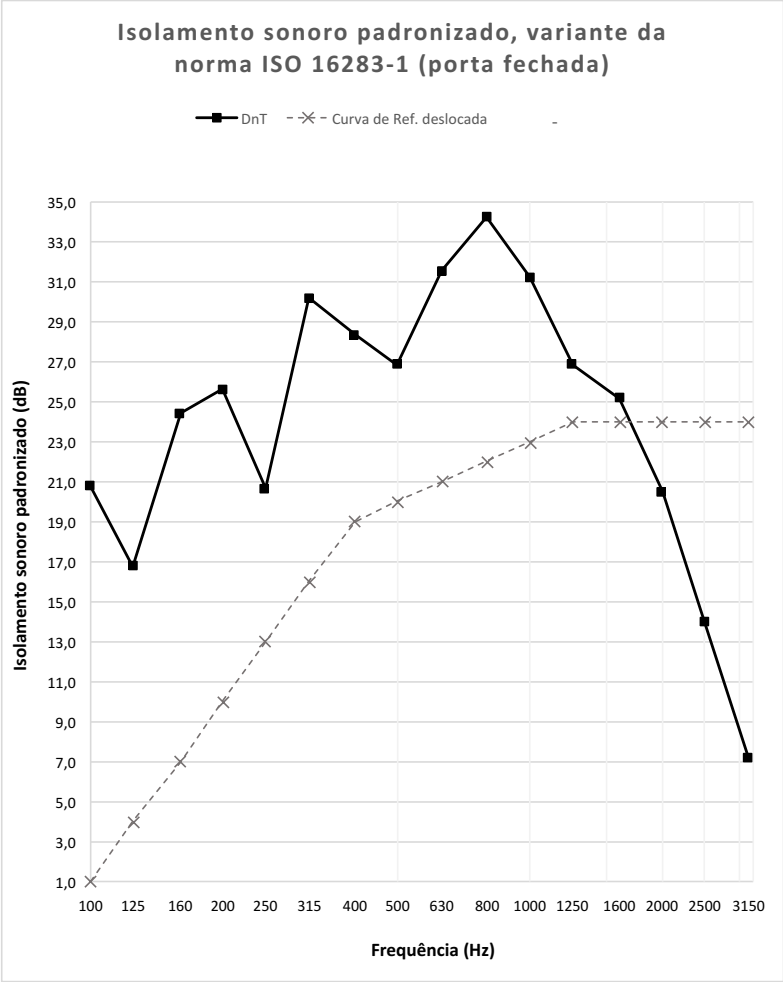

[illegible]


DnT,w	16
-------	----

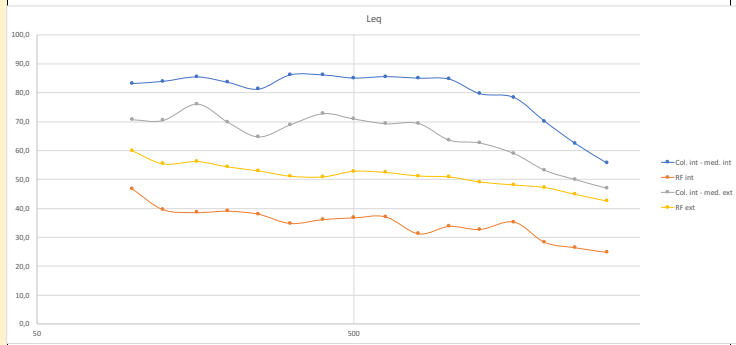

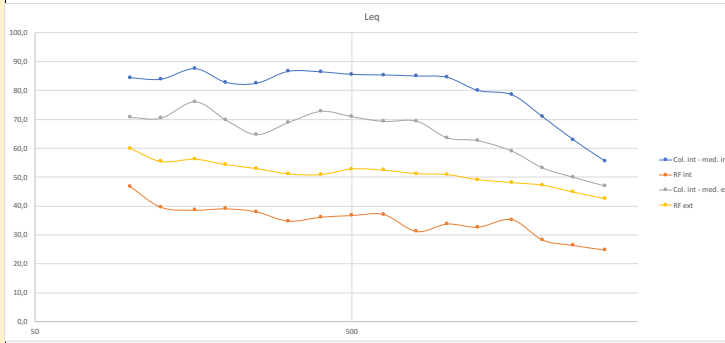
[illegible]

Banda de Frequências (Hz)	Valores de referência (em dB)	Curva de referência ajustada	DnT (em dB)
	Bandas de terços de oitava		
100	33	8	16,9
125	36	11	15,2
160	39	14	16,8
200	42	17	20,9
250	45	20	23,7
315	48	23	24,3
400	51	26	22,8
500	52	27	21,7
630	53	28	25,6
800	54	29	27,6
1000	55	30	28,3
1250	56	31	26,2
1600	56	31	27,5
2000	56	31	31,4
2500	56	31	27,0
3150	56	31	25,5

8
8
8
8
8
8
8
8
8
8
8
8
8
8
8

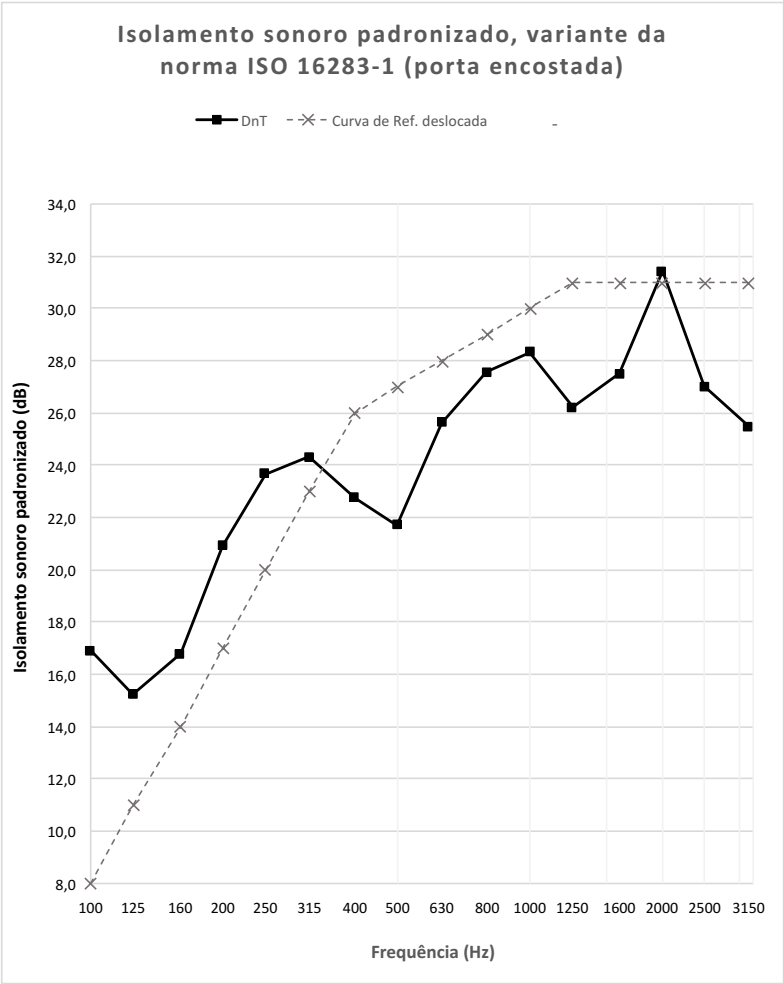

Isolamento sonoro padronizado, segundo a norma ISO 16283-1

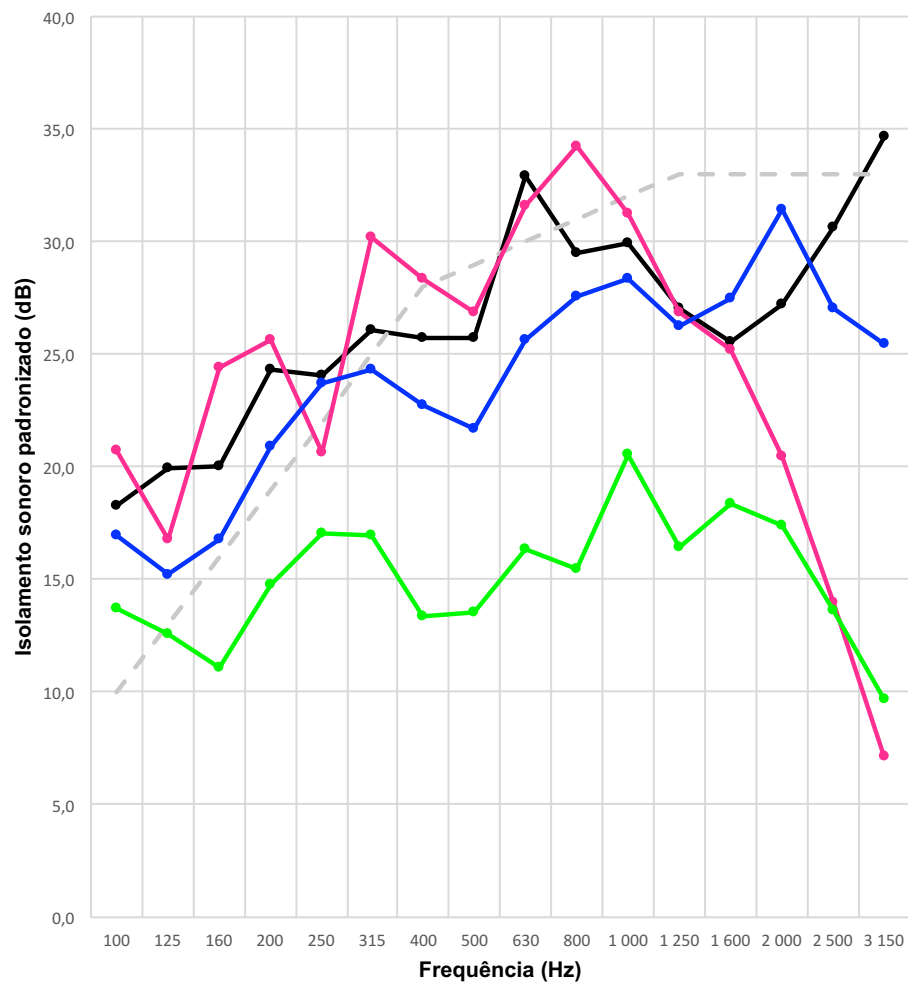

—●— D2m,nT
 —●— Porta fechada (D*2m,nT)
 —●— Porta encostada (D*2m,nT)
 — Curva de referência
 —●— Porta aberta (D*2m,nT)