
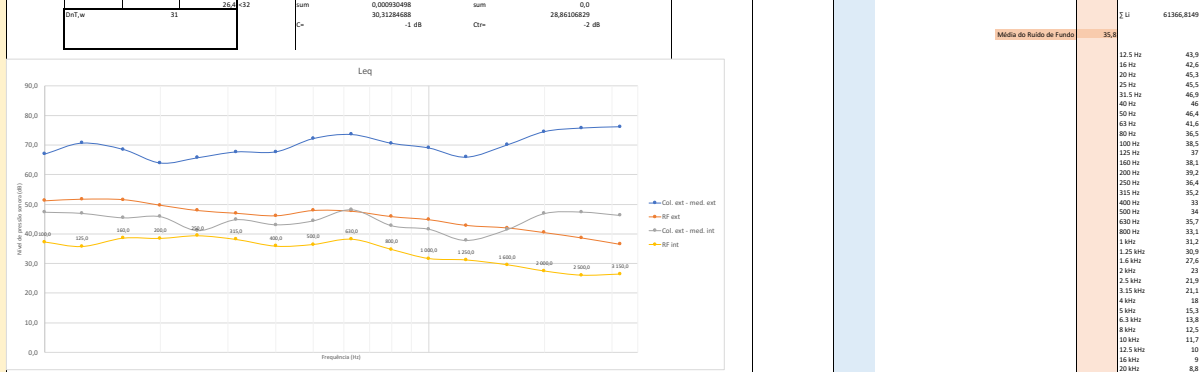
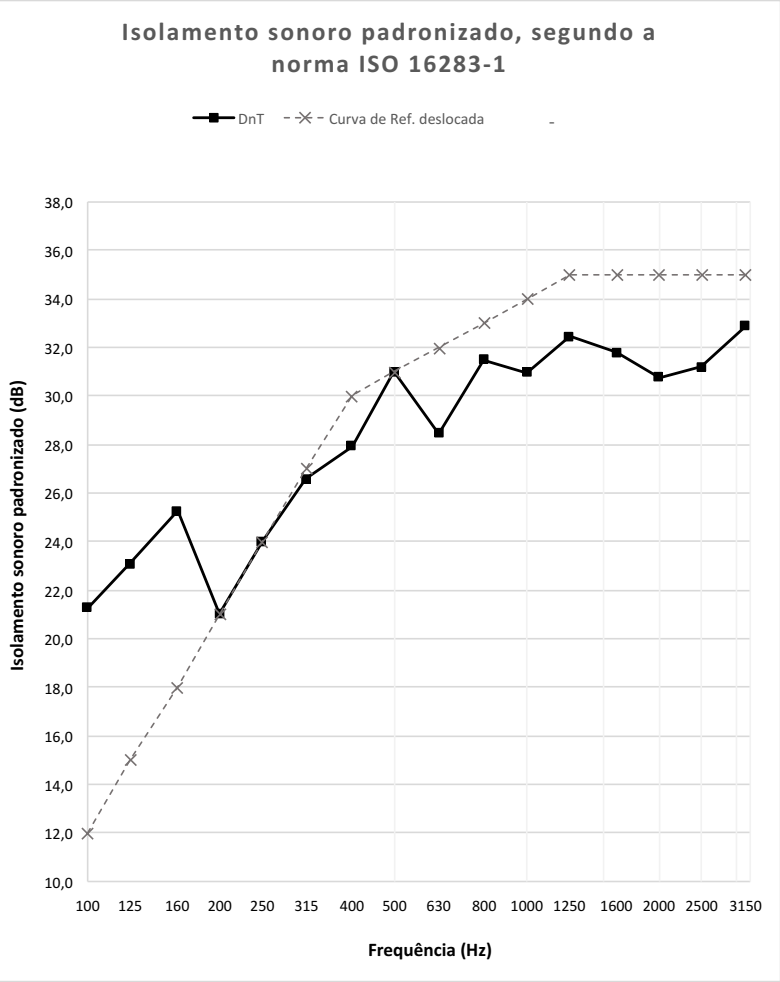


[illegible]

Banda de Frequências (Hz)	Valores de referência (em dB)	Curva de referência ajustada	DnT (em dB)
	Bandas de terços de oitava		
100	33	12	21,3
125	36	15	23,1
160	39	18	25,3
200	42	21	21,0
250	45	24	24,0
315	48	27	26,6
400	51	30	27,9
500	52	31	31,0
630	53	32	28,5
800	54	33	31,5
1000	55	34	31,0
1250	56	35	32,5
1600	56	35	31,8
2000	56	35	30,8
2500	56	35	31,2
3150	56	35	32,9


10
10
10
10
10
10
10
10
10
10
10
10
10
10
10
10
10
10

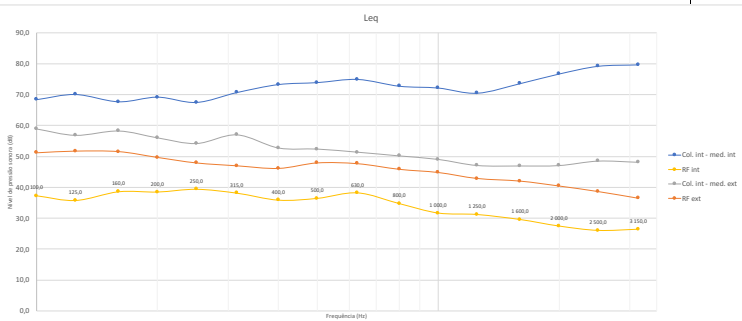


[illegible][illegible]

Banda de Frequências (Hz)	Valores de referência (em dB)	Curva de referência ajustada	DnT (em dB)	
	Bandas de terços de oitava			
100	33	9	11,9	10
125	36	12	14,2	10
160	39	15	11,7	10
200	42	18	16,3	10
250	45	21	16,4	10
315	48	24	16,3	10
400	51	27	24,0	10
500	52	28	25,9	10
630	53	29	28,5	10
800	54	30	27,5	10
1000	55	31	28,2	10
1250	56	32	28,7	10
1600	56	32	31,5	10
2000	56	32	33,8	10
2500	56	32	34,0	10
3150	56	32	34,4	10

10
10
10
10
10
10
10
10
10
10
10
10
10
10
10
10
10

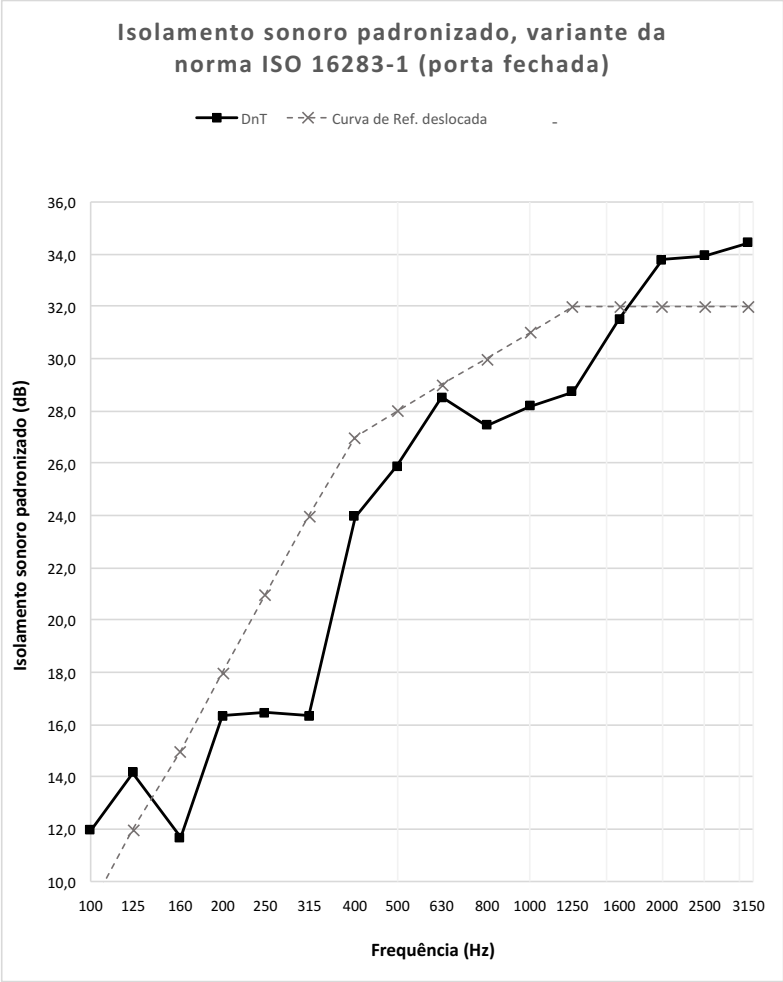

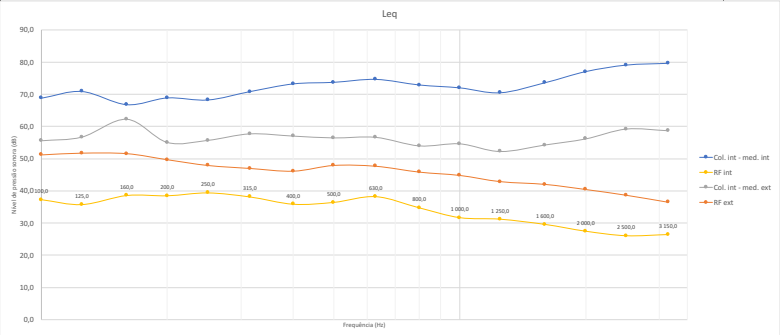[illegible]


[illegible]

1. *Journal of Management Studies*, 1997, 34, 1, 1-15.

1


100

2.250,0

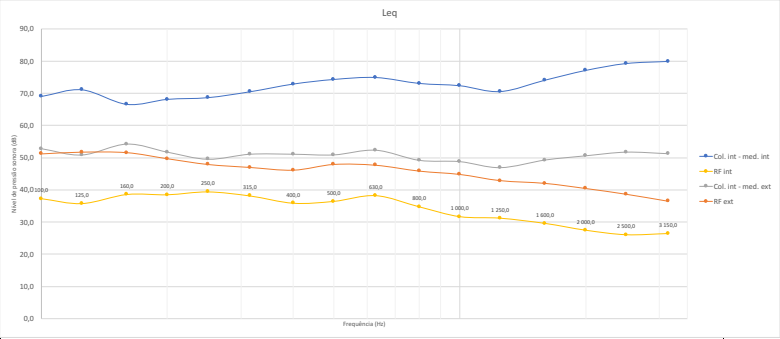


Banda de Frequências (Hz)	Valores de referência (em dB)	Curva de referência ajustada	DnT (em dB)
	Bandas de terços de oitava		
100	33	10	22,9
125	36	13	22,0
160	39	16	21,0
200	42	19	22,7
250	45	22	26,2
315	48	25	24,2
400	51	28	25,9
500	52	29	28,9
630	53	30	27,0
800	54	31	29,5
1000	55	32	28,8
1250	56	33	29,1
1600	56	33	28,9
2000	56	33	29,6
2500	56	33	30,3
3150	56	33	31,6

-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7
-7

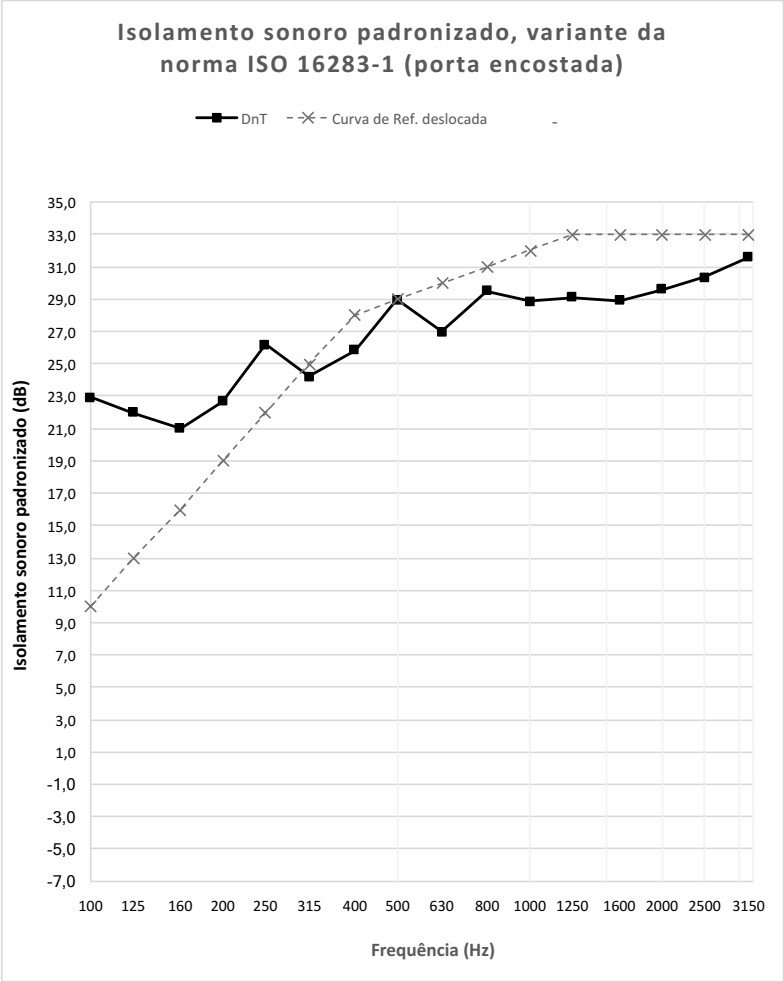

Isolamento sonoro padronizado, segundo a norma ISO 16283-1

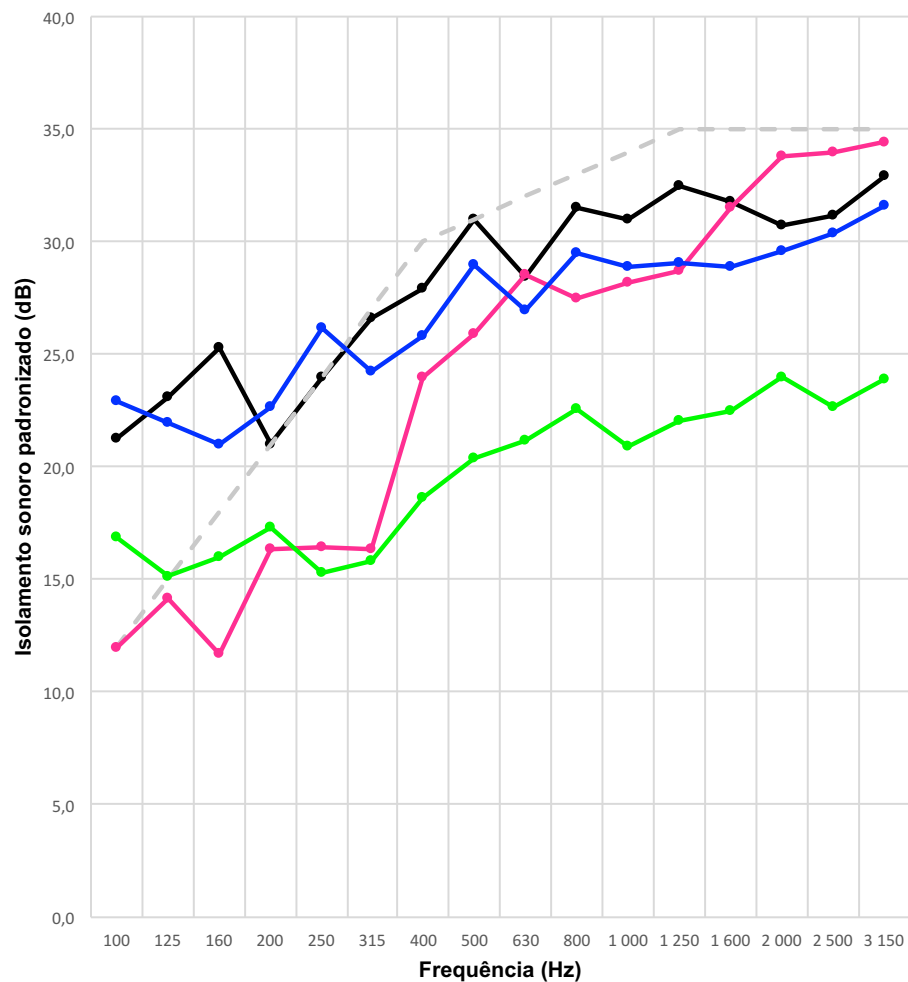

—●— D2m,nT
 —●— Porta fechada (D*2m,nT)
 —●— Porta encostada (D*2m,nT)
 — Curva de referência
 —●— Porta aberta (D*2m,nT)